

## LIGHTWEIGHT, HEAVY-DUTY, ALUMINUM IMPACT WRENCHES

- Lightweight, high power, low noise
- Composite body and aluminum clutch housing
- Great durability and power
- 3 forward power settings
- Clutch Type: Twin hammer
- Socket retainer: Friction ring



TLZ323




TLZ320

Model No.	Mfg. No.	Air Consumption	Air Inlet	Sound Level (dBA)	Drive	No Load RPM	Torque Working	Torque Max.	Weight lbs.	Length"	Vibration Level	Price /Each
TLZ320	CP8222-R	32 CFM	1/4" NPTF	100	3/8"	11500	184-295 ft.-lbs.	331 ft.-lbs.	2.53	6.96	3.9 m/s <sup>2</sup>	
TLZ321	CP8242-R	32 CFM	1/4" NPTF	100	1/2"	11500	184-295 ft.-lbs.	479 ft.-lbs.	2.64	6.96	3.9 m/s <sup>2</sup>	
TLZ322	CP8252-R	28.8 CFM	1/4" NPTF	105	1/2"	9000	220-590 ft.-lbs.	775 ft.-lbs.	4.4	7.87	7.9 m/s <sup>2</sup>	
TLZ323	CP8272-D	48 CFM	3/8" NPTF	107	3/4"	6500	100-960 ft.-lbs.	1217 ft.-lbs.	7.16	9.05	9 m/s <sup>2</sup>	

## INDUSTRIAL IMPACT WRENCHES

- Heavy-duty
- More durable
- More serviceable

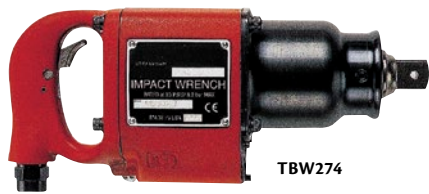

TBW274



TBW429



TG059



TG065

Model No.	Mfg. No.	Drive"	Socket Retainer	Clutch Type	Handle Style	Torque Working pi.-lbs.	Torque max ft.-lbs.	Air Consumption CFM*	Overall Length"	Side to Center"	Weight lbs.	Price /Each
<b>3/4" DRIVE- 75-650 FT-LB</b>												
TG059	CP9561	3/4	Hole	Pin	Pistol	500	750	30	8.5	1.535	11.1	
<b>1"-1 1/2" DRIVE- 280-2400 FT-LB</b>												
TY293	6151590160	1	Hole	-	D-Handle	900-1800	2800	68	-	-	-	
TG065	CP0611P RS	1	Hole	2-jaw	Pistol	900	2800	48	10.7	1.811	23.1	

\*Free speed

Torque ranges should be used as a guide only. Final torque will depend on the joint, operating pressure and drive accessories. Air inlet 1/4" NPT.

## CWC PREMIUM COMPOSITE SERIES - IMPACT WRENCHES

- The ultimate balance of performance, ergonomics and durability
- Composite housing with a high output motor that delivers a maximum power-to-weight ratio
- On hand push button forward/reverse with variable speed trigger, dial speed settings
- Twin hammer impact mechanism



TYN507

## CWM PREMIUM METAL SERIES - IMPACT WRENCHES

- Engineered for heavy duty applications in the most demanding environment
- Rugged all-metal construction
- Withstands heavy abuse with twin impact mechanism
- Large lever forward/reverse and speed settings with variable speed trigger
- Soft touch grip protects against slip, temperature and vibration



TYN499



Model No.	Mfg. No.	Air Consumption CFM	Retainer Type	Drive"	Impacts Per Minute	Free Speed RPM	Max Torque ft.-lbs.	Price /Each
TYN508	CWC-2500C	2.7	Quick Change Chuck	1/4	1200	13 000	50	
TYN507	CWC-250R	2.7	Ring	1/4	1200	13 000	50	
TYN501	CWC-375R	5.3	Ring	3/8	1600	10 000	450	
TYN503	CWC-375P	5.3	Pin	3/8	1600	10 000	450	
TYN509	CWC-500R	5.7	Ring	1/2	1250	8000	800	
TYN512	CWC-500P	5.7	Pin	1/2	1250	8000	800	
TYN511	CWC-500RE	5.7	Ring*	1/2	1250	8000	800	
TYN505	CWC-750P	9.7	Pin	3/4	1200	6500	1400	

\*Extended anvil



Model No.	Mfg. No.	Air Consumption CFM	Retainer Type	Drive"	Impacts Per Minute	Free Speed RPM	Max Torque ft.-lbs.	Price /Each
TYN496	CWM-375R	3.8	Ring	3/8	1400	12 000	340	
TYN497	CWM-375P	3.8	Pin	3/8	1400	12 000	340	
TYN499	CWM-500R	5.6	Ring	1/2	1200	9000	850	
TYN500	CWM-500P	5.6	Pin	1/2	1200	9000	850	
TYN498	CWM-750P	7.6	Pin	3/4	1200	6000	1350	